

# BIFACIAL TWINPLUS MODULE SERIES

HIGH EFFICIENCY MONO-PERC BM4-9B-T

# 435-455W



## EXTRAORDINARY PRODUCT PERFORMANCE

- ◆ Up to 25% additional power yield benefited from bifacial technology
- ◆ Lower power loss in cell connection and under shading conditions
- ◆ Competitive high-temperature performance with ameliorated temperature coefficient
- ◆ Higher power generation with multi-busbar and half-cut technology

## HIGH QUALITY RELIABILITY


- ◆ Optimized electrical design lowers hot spot risk and operating current
- ◆ Corrosion resistance guarantees enhanced reliability in harsh environments
- ◆ Minimized Risk of microcrack and snail trail

## EASY INSTALLATION

- ◆ Framed design improves mounting and racking method compatibility
- ◆ Safer and easier handling during transportation and installation

## PID RESISTANT

- ◆ Industry-leading cell processing technology and electrical design ensures solid PID resistance

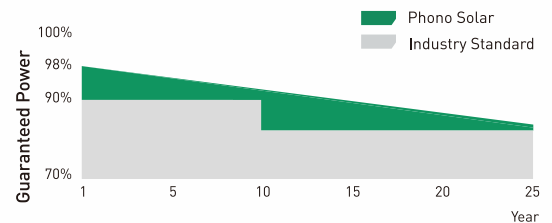

12-year Product Warranty | 25-year Linear Performance Warranty

## MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001:2015 / Quality management system

ISO 14001:2015 / Standards for environmental management system

OHSAS 18001:2007 / International standards for occupational health & safety

IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules-guidelines for increased confidence in PV module design qualification and type approval



Bloomberg Tier<sup>1</sup>  
NEW ENERGY FINANCE



## ELECTRICAL TYPICAL VALUES

Model	PS435M5-24/TH		PS440M5-24/TH		PS445M5-24/TH		PS450M5-24/TH		PS455M5-24/TH	
	PS435M5H-24/TH	PS440M5H-24/TH	PS445M5H-24/TH	PS450M5H-24/TH	PS455M5H-24/TH	STC	NOCT	STC	NOCT	STC
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Power (Pmpp)	435	324	440	327	445	331	450	335	455	339
Rated Current (Impp)	10.66	8.61	10.73	8.67	10.80	8.73	10.87	8.78	10.94	8.84
Rated Voltage (Vmpp)	40.81	37.57	41.01	37.76	41.21	37.94	41.40	38.12	41.60	38.30
Short Circuit Current (Isc)	11.20	9.05	11.28	9.11	11.36	9.18	11.44	9.24	11.52	9.31
Open Circuit Voltage (Voc)	49.17	46.42	49.38	46.61	49.59	46.81	49.79	47.00	50.01	47.21
Module Efficiency (%)	19.89		20.12		20.35		20.58		20.80	

STC(Standard Testing Conditions):Irradiance 1000W/m<sup>2</sup>, AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/S

## BIFACIAL ELECTRICAL VALUES

5%	Maximum Power (W)	450	455	461	466	471
	Module Efficiency (%)	20.58	20.80	21.08	21.31	21.54
15%	Maximum Power (W)	481	486	492	497	503
	Module Efficiency (%)	21.99	22.22	22.50	22.72	23.00
25%	Maximum Power (W)	511	517	523	529	535
	Module Efficiency (%)	23.36	23.64	23.91	24.33	24.46

## MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline 166 x 83mm
	Length: 2103mm (82.80 inch)
Dimension (L x W x H)	Width: 1040mm (40.94 inch) Height: 35mm (1.38 inch)
Weight	25.0kg (55.12 lbs)
Glass	3.2mm Toughened Glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	4mm <sup>2</sup> (IEC), (+):450mm,(-):250mm or Customized Length
Junction Box	IP 68 Rated

## TEMPERATURE RATINGS

Voltage Temperature Coefficient	-0.28%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.35%/°C
Tolerance	0~+5w
NOCT	45±2°C
Bifaciality	70±10%




## ABSOLUTE MAXIMUM RATING

Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	25A
PV Module Classification	II
Maximum System Voltage	DC 1000V/1500V

## PACKING CONFIGURATION

Container	20' GP	40' HQ
Pieces/Container	255	682

## ELECTRICAL CHARACTERISTICS

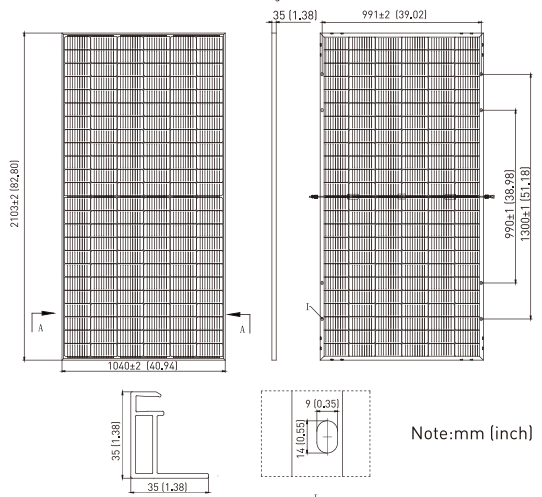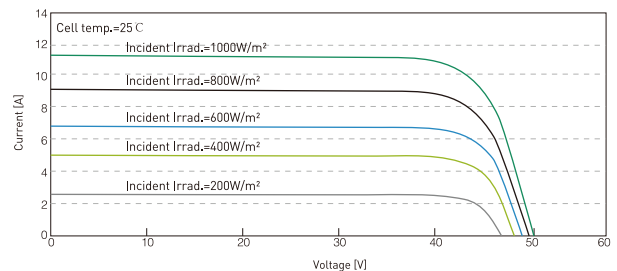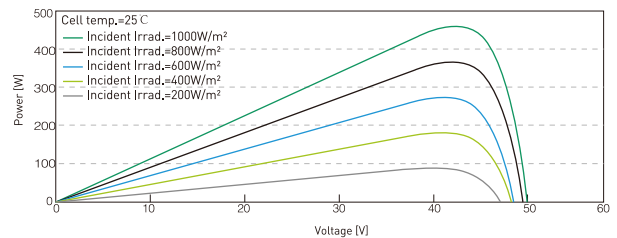

Note:mm (inch)